

Product Feature :

TPU 90A is a thermoplastic polyurethane elastomer. It has good good mechanical properties, good heat resistance, humidity resistance, and excellent flexibility under very low temperature. It is both an injection and extrusion molding grade for high-end products.

Classifications Plastic Type TPU

Plastic Sub-Type Polyester-based

Applications:

Wire & cable, high pressure oil tubes, conveyor belts, shoes, seals, screen packs.

Typical Properties	Test Method	Units	Typical values*
Form	N/A	-	Granules
Color	N/A	-	Transparent
Hardness	ASTM D-2240	Shore A	90
Gravity	ASTM D-792	g/cm ³	1.18
100% Modulus of elasticity	ASTM D412	MPa	8
Tensile Stress	ASTM D-412	MPa	38
Tear Strength	ASTM D-624	N/mm	120
Ultimate Elongation	ASTM D-412	%	850
DIN Abrasion	DIN 53516	mm ³	30
Melt Volume-Flow Rate (200°C/5Kg)	ASTM D1238	cm ³ /10 min.	20

* All these physical properties are based on injection molded samples, which are conditioned at 23 °C/50% for 24h. Above values are typical values and should not be used as specifications.

Identifiers

Chemical Name: MDI/ butylene glycol/ adipic acid copolymer CAS # 26375-23-5 Synonyms: Polyester-based TPU

Processing methods:

Injection, extrusion, calendaring, T-die extrusion

Special features: Excellent mechanical properties, outstanding abrasion resistance, short cycle time

Complying with FDA (21CFR 177.1680, 177.2600), RoHS, REACH, etc.

Applications

Elastic bands
Automotive Parts
Compounding
Footwear
Seals
Conveyor belts
Injection-molded engineering components
Screen packs
Oil tubes

Value Propositions

Short cycle time
Good wear resistance
Excellent Mechanical Properties
Outstanding abrasion resistance

Market Segments


Plastics
Wire & cable
Footwear
Films & Sheets
Transportation
Automotive

Processing Guidelines

TECHNICAL DATA SHEET

Injection Moulding Guidelines


Mold Shrinkage:	0.015 ~ 0.025 inch/inch
Injection Speed:	Medium - Fast
Injection Pressure:	Medium - Fast
Back Pressure:	Low - Medium
Holding Pressure:	Sufficient to pack the mould
Cooling:	Can be demoulded when parts have sufficiently cooled

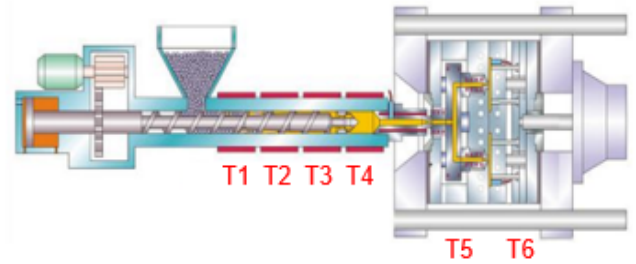

Barrel Temperature (°C)	T1: 150-170	T2: 170-190	T3: 180-200	T4: 200-215	T5/T6: 25-45
-------------------------	-------------	-------------	-------------	-------------	--------------

Extrusion Guidelines

L/D Ratio:	20:1 - 25:1
Compression Ratio:	2.5 - 3.0
Breaker Plate/Screen:	Both should be used
Draw Down:	5 - 10%
Cooling:	Cold water bath

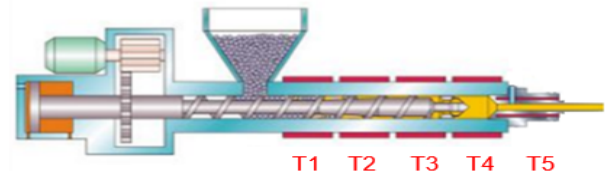

Barrel Temperature (°C)	T1: 150-170	T2: 200-210	T3: 210-230	T4: 200-235	T5: 180-200
-------------------------	-------------	-------------	-------------	-------------	-------------

Processing Notes:

- Drying before processing, it is recommended to dry for 3-5 hours at 80 degrees centigrade. If it is damp, the drying time will be lengthened.
- Cleaning the screw and die with PP or PE before and after processing.
- The gate and runner can be recycled, but less than 15%.
- PE/EVA base color masterbatch is better for coloring.

The information and suggestions contained in this bulletin are to the best of our knowledge, accurate and reliable, but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's suggestions. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the